


DASSY[®]
FITS THE JOB

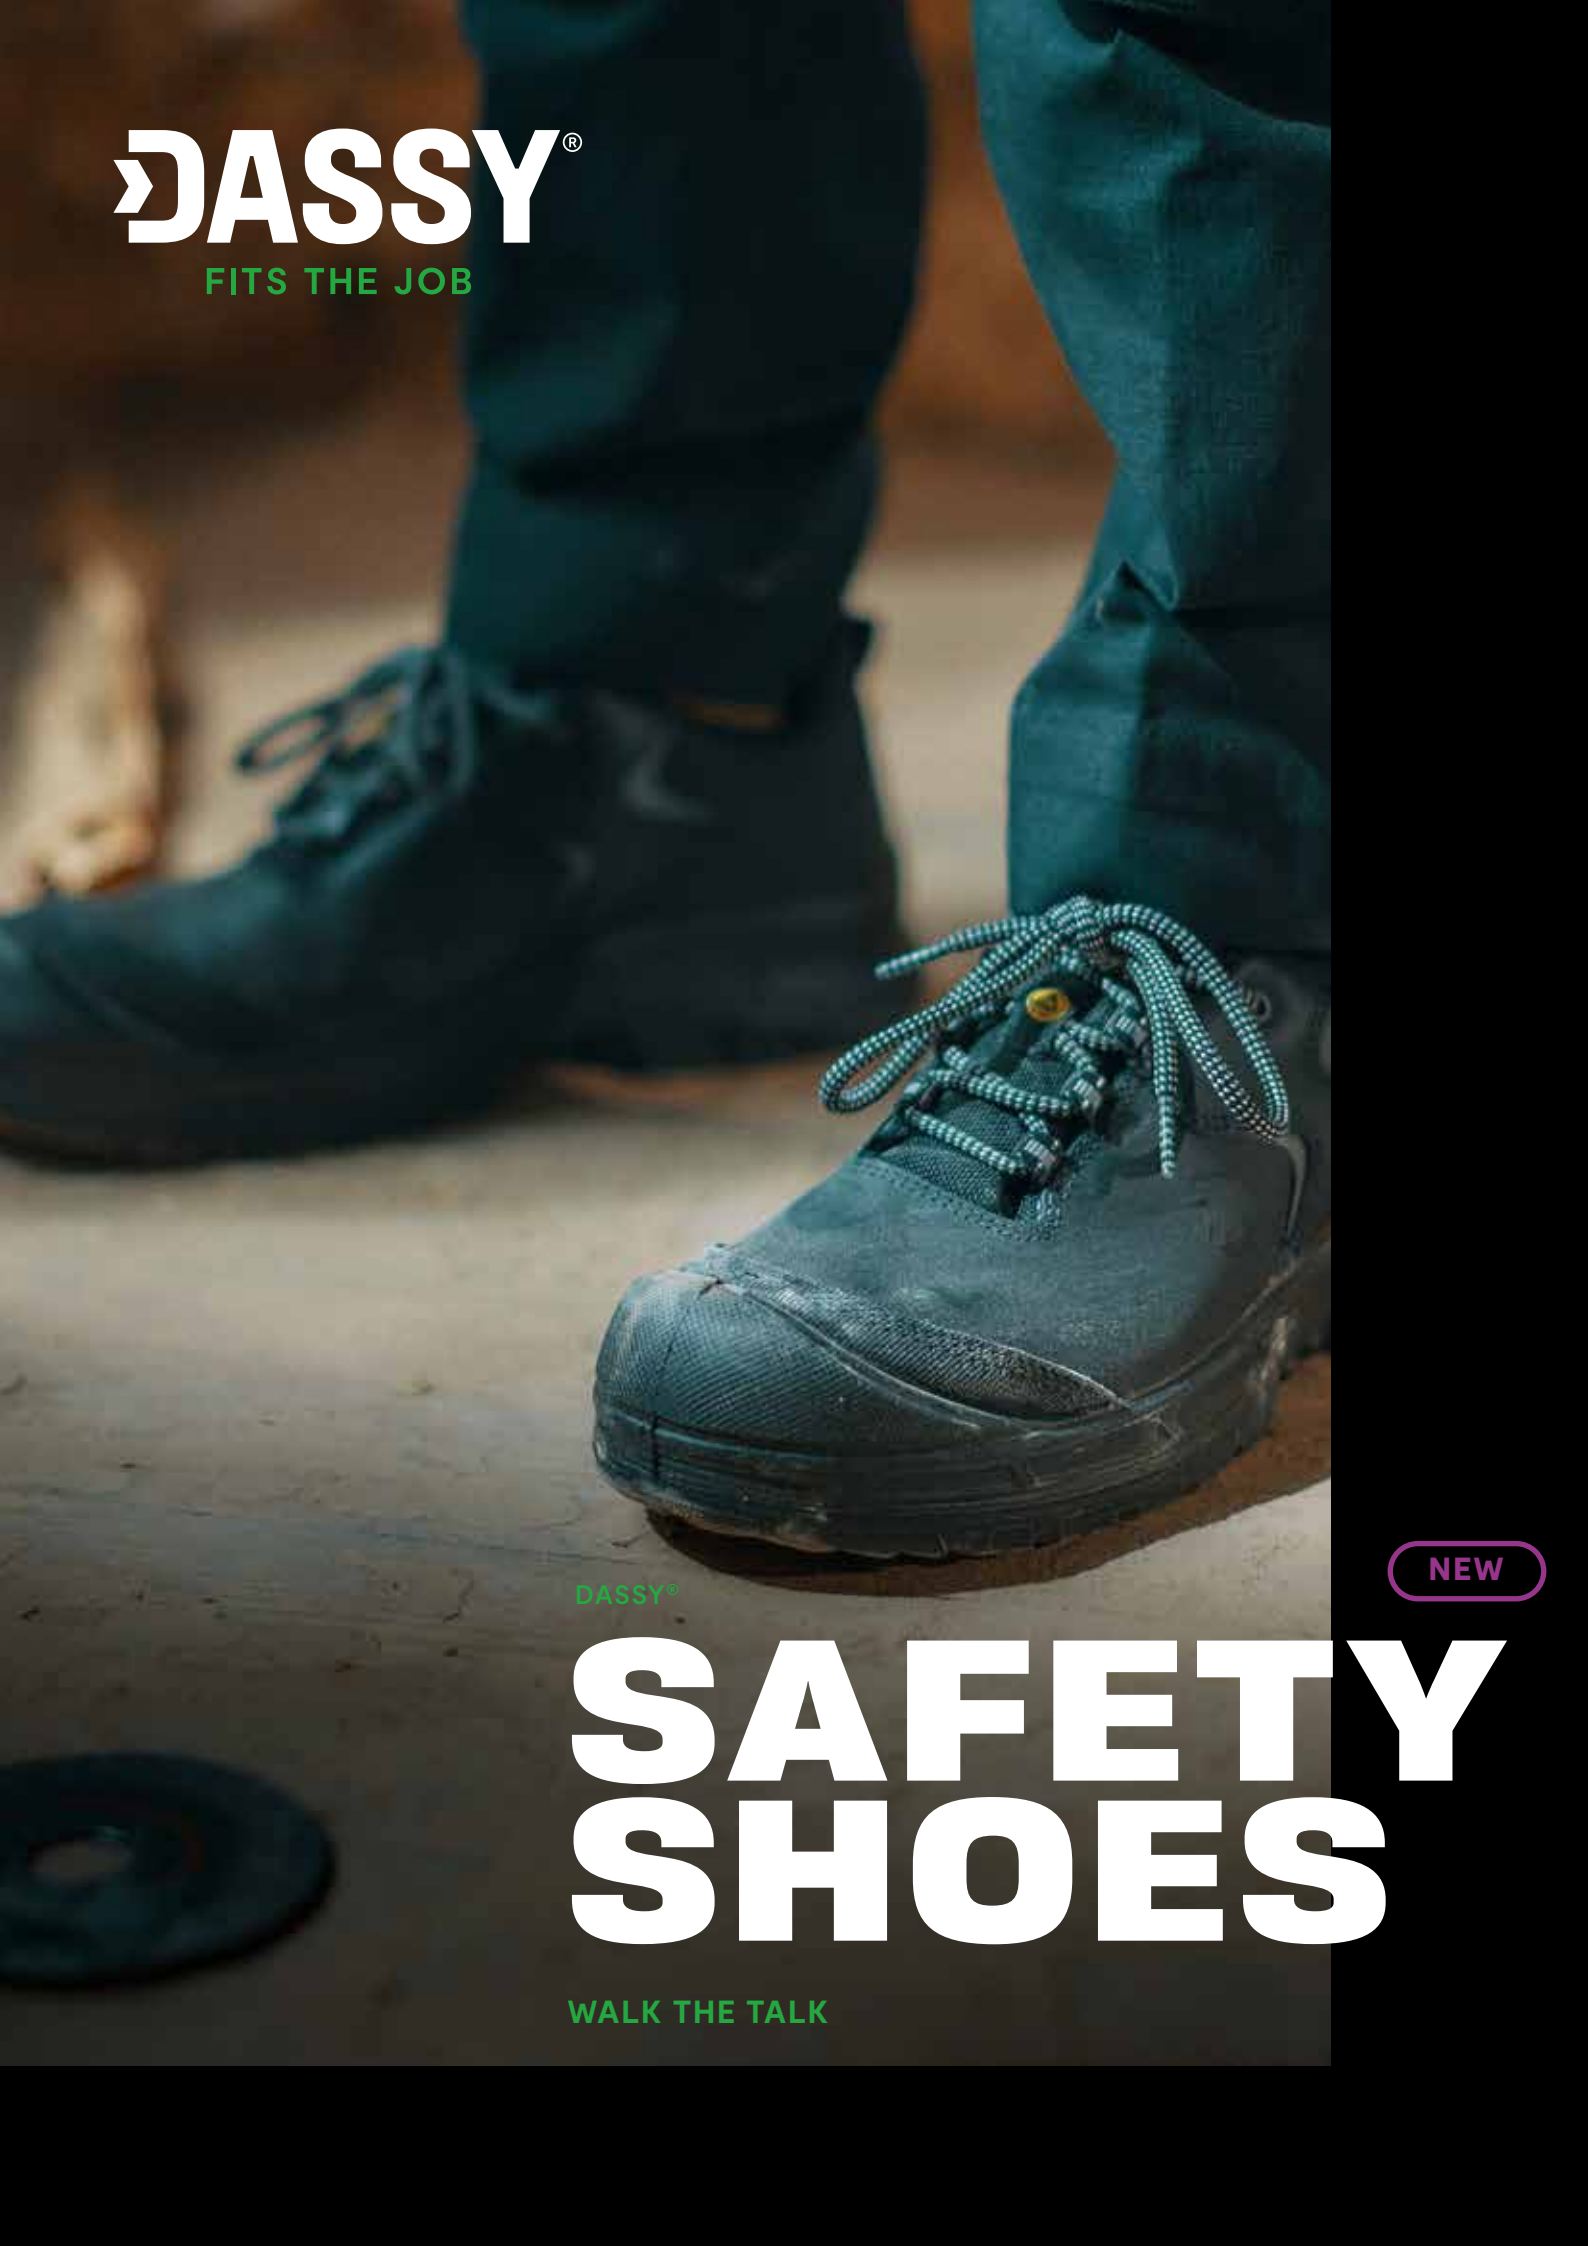

DASSY[®]

NEW

SAFETY SHOES

WALK THE TALK

EN ISO 20345:2022

AN UPDATED STANDARD FOR SAFETY SHOES

As a professional, you know only too well how important high-quality safety shoes are. After all, your feet need to be extremely well protected against workplace hazards.



DASSY® SAFETY SHOES

CERTIFICATION

Did you know that the **EN ISO 20345 standard** related to safety shoes has been updated? The updated version was published in March 2023.

Don't panic, certificates for safety shoes don't automatically expire when a standard is updated. All certificates for shoes certified to EN ISO 20345:2011 remain valid until their expiry date (which is 5 years from the date of issue).

	SB	S1	S1P	S1PS S1PL	S2	S3	S3S S3L	S6	S7	S7S S7L
Toe protection (200 ≥ Joule)										
Basic slip resistance (ceramic floor + soap solution)										
Closed heel										
Antistatic (A)										
Shock absorbing heels (E)										
Water penetration and absorption (WPA)										
Waterproof (WR)										
Metallic puncture resistant midsole (4.5mm nail)										
Non-metallic puncture resistant midsole										

PL = large nail 4.5mm
PS = slim nail 3mm



DASSY® SAFETY SHOES

WHAT CHANGES FOR DASSY® SHOES?

Slip resistance

Slip resistance on soapy ceramic floors, previously designated with the SRA marking, is now a basic requirement for all safety footwear. This means that there will not be any extra marking for this requirement. An additional slip resistance test on a ceramic floor with glycerin (an oily solution) may be carried out as an optional requirement and will be indicated with an SR marking.

Perforation resistance

In addition, the requirements and test methods for the optional perforation resistance requirement have been updated. The marking of the old standard used only the letter P. From now on, the letter P will only be used to designate shoes with metal midsoles. Non-metallic midsoles will now be identified by a PL or L, PS or S marking, depending on the type of nail used for the test.

PL or L	PS or S
passed the perforation test with a 4.5 mm nail.	passed the perforation test with a 3 mm nail.

Waterproof

There are two new categories of protection levels for indicating safety shoes that have been made fully waterproof by using a membrane.

S6	S7
= S2 + WR	= S3 + WR

WRU becomes WPA

Shoes with a water-resistant upper will be designated as WPA instead of WRU under the updated standard. The WPA marking refers to the water penetration and absorption tests conducted to determine the water resistance of the upper material. The designation WR refers to the water resistance of the entire shoe.

Fuel and oil resistance

Fuel and oil resistance (FO) is no longer a basic requirement.

Certified scuff cap (SC)

Finally, there is a new optional requirement, i.e. the scuff cap, denoted as SC. What is a scuff cap? A scuff cap is an extra tough protective layer on top of the shoe. This prevents rapid wear of the shoe in that area.



DASSY® SAFETY SHOES

A SAFE OUTFIT FROM HEAD TO TOE

Because your feet need quality protection too. That's possible with DASSY® Safety Shoes, which are 100% assembled in Italy. A good safety shoe not only provides the necessary protection, but is also light, flexible and comfortable. In any workplace, in any season and for any profession.

Safety Shoes

DASSY

4

This family of 3
is ideal for jobs
in construction
or building

Check out the entire
DASSY® Safety shoes collection at

www.dassy.eu

NEW

DASSY®

ANUBIS S3S › LOWCUT SAFETY SHOE 25597

Upper Full grain leather + textile
 Lining Plasmafeel®
 Safety toecap Composite fiberglass (TYPE B)

Insole Eco Soft
 removable | antibacterial | absorbent
 Midsole Composite nail penetration plate (S)
 EN ISO 22568-4:2021
 Exterior sole PU | PU

Certification EN ISO 20345:2022 | DGUV 112-191
 FO SC SR ESD

Colour	Black	Model	Lowcut
Size	EU 38-48 UK 5-13	Fastener	Laces



NEW

DASSY®

AMON S3S › MIDCUT SAFETY SHOE 25596

Upper Full grain leather + textile
 Lining Plasmafeel®
 Safety toecap Composite fiberglass (TYPE B)

Insole Eco Soft
 removable | antibacterial | absorbent
 Midsole Composite nail penetration plate (S)
 EN ISO 22568-4:2021
 Exterior sole PU | PU

Certification EN ISO 20345:2022 | DGUV 112-191
 FO SC SR ESD

Colour	Black	Model	Midcut
Size	EU 38-48 UK 5-13	Fastener	Laces



NEW

DASSY®

SETH S7S › HIGHCUT SAFETY SHOE 25598

Upper Full grain leather + textile
 Lining Windtex®
 Safety toecap Composite fiberglass (TYPE B)

Insole Eco Soft
 removable | antibacterial | absorbent
 Midsole Composite nail penetration plate (S)
 EN ISO 22568-4:2021
 Exterior sole PU | Gummi

Certification EN ISO 20345:2022 | DGUV 112-191
 FO SC HRO SR ESD

Colour	Black	Model	Highcut
Size	EU 38-48 UK 5-13	Fastener	Laces



DASSY® SAFETY SHOES

SAFETY SHOES UNDER THE MICROSCOPE

Below is an overview of all the important components that can be found on shoes from the DASSY® range. The components listed below are not necessarily present in all shoes. Check the product data carefully for each product.

SCUFF CAP
with abrasion-resistant reinforcement.

SAFETY TOECAP
in composite or steel.

LINING
Plasmafeel® and
Windtex®.

FO
fuel and oil
resistant sole.

ANATOMICALLY SHAPED FOOTBED
remains unchanged throughout
the life of the shoe.





REFLECTIVE
details.


TEXTILE INSERTS
breathable and water-repellent.

**HEEL
REINFORCEMENT**
increases stability.

INSOLE
in polyurethane with
shock absorbing heel.

OUTSOLE
in polyurethane or
rubber with shock
absorbing heel.

SAFETY MIDSOLE
in synthetic material or
steel, protects the foot from
penetration of sharp objects.



**SYNTHETIC OR CAMBRIC
(COMPOSHANK)** supports
the arch of the foot.

NEW



DASSY®
HORUS S3S › LOWCUT SAFETY SHOE 25595

Upper Microfibre + textile
Lining Plasmafeel®
Safety toecap Composite fiberglass (TYPE B)

Insole Tech Soft removable | antibacterial | absorbent
Midsole Composite nail penetration plate (S)
EN ISO 22568-4:2021
Exterior sole PU | PU

Certification EN ISO 20345:2022 | DGUV 112-191
FO SR ESD

Colour	Black White	Model	Lowcut
Size	EU 36-48 UK 3-13	Fastener	Laces



DASSY®
NOX S3 › LOWCUT SAFETY SHOE 10011

Upper Textile
Lining Plasmafeel®
Safety toecap Composiet

Insole Tech Soft removable | antibacterial | absorbent
Midsole zero perforation | synthetic
Exterior sole PU | PU

Certification EN ISO 20345:2012 | DGUV 112-191 | SRC

Colour	Azure blue black Anthracite grey black	Model	Lowcut
Size	EU 36-48 UK 3-13	Fastener	Laces



DASSY®
ACHILLES S1PL › SAFETY SANDAL 10003

Upper Suede leather + textile
Lining Plasmafeel®
Safety toecap Composite fiberglass (TYPE B)

Insole Ares removable | antibacterial | absorbent
Midsole Composite nail penetration plate (L)
EN ISO 22568-4:2021
Exterior sole PU | PU

Certification EN ISO 20345:2012 | DGUV 112-191
FO SR

Colour	Black	Model	Sandal
Size	EU 38-48 UK 5-13	Fastener	Velcro



FOOTWEAR

	Shock absorbing heels (E)	Metal free	Breathable	Heat resistant sole (HRO)	Oil & fuel resistance (FO)	Antistatic (A)	Midsole: zero perforation - synthetic	Midsole: composite nail penetration plate (L/S)	Water-repellent (WRU/WPA)	Waterproof (WR)	Safety toecap: composite fiberglass	ESD	SRC	SR	DGUV
DASSY® ANUBIS S3S							-	S	WPA	-			-		
DASSY® AMON S3S							-	S	WPA	-			-		
DASSY® SETH S7S							-	S	-				-		
DASSY® HORUS S3S							-	S	WPA	-			-		
DASSY® ACHILLES S1PL							-	L	-	-		-	-		-
DASSY® NOX S3								-	WRU	-				-	



DASSY® SAFETY SHOES

ACCESSORIES

Insoles and laces are available separately to give shoes a new life.





DASSY®
ARES › INSOLE (PER PAIR) 800055

Antistatic, antibacterial, breathable/sweat absorbent, heel shock absorber, anti-slip on reverse side. **Suitable for DASSY® Achilles.**

Stof - polyester / latex / polyethylene

Size - EU 36-46 | UK 3-13

Colour - Black



DASSY®
TECH SOFT › INSOLE (PER PAIR) 800055

Thermoformed, antistatic, antibacterial, breathable/sweat absorbent, heel shock absorber, arch support, active carbons to reduce odours, anti-fungus. **Suitable for DASSY® Nox, Horus.**

Base layer - 97% polyurethane / 3% carbon
Top layer - 82% polyester / 18% carbon, 330 gr/m²

Size - EU 36-46 | UK 3-13

Colour - Grey



DASSY®
ECO SOFT › INSOLE (PER PAIR)

Thermoformed, antistatic, antibacterial, breathable/sweat absorbent, heel shock absorber, arch support, active carbons to reduce odours, anti-fungus. **Suitable for DASSY® Anubis, Amon, Seth.**

Base layer - 99,2% polyurethane / 0,8% recycled rubber
Top layer - 82% polyester / 18% carbon

Size - EU 36-46 | UK 3-13

Colour - Grey



DASSY®
LEOS › FLAT LACES (PER 5 PAIR) 800075

Length - Available in 120 cm, suitable for the following DASSY® shoes: Sparta and Corus.

Fabric - 65% polyester/35% polyamide

Colour - Black

0704



DASSY®
CERES › ROUND LACES (PER 5 PAIR) 800063

Length 130cm - suitable for the following DASSY® shoes: Amon, Anubis and Horus.
Length 150cm - suitable for the DASSY® Seth.

Fabric - 65% polyester/35% polyamide

Colour - Black

0704



QUESTIONS?

Feel free to contact your Account Manager or Team Customer Care with your questions at any time. We'll be happy to help you further.

+32 50 799 320
customer care@dassy.eu
dassy.eu



© DISCLAIMER AND COPYRIGHT:

The DASSY® name and logo are legally protected. Any use of these or similar signs is strictly prohibited without prior and written consent of DASSY EUROPE BV. All other names or signs appearing in this publication are for identification purposes of the DASSY® models or DASSY® collections and are therefore always subordinate to the brand itself. The content of this publication is also protected by copyright. Any copy or reproduction is prohibited without prior and written consent by DASSY®. DASSY® pursues a continuous product development and reserves the right to change the collection, technical specifications or designs at all times and without prior notification. DASSY® will not be held responsible for printing errors. Product colours and details may differ slightly from the originals.